



-AC- SB908AN



183x190x70mm

100~28 CFM

Model No	额定电压	电压范围	频率	输入功率	参考转速	最大风量	最大风压	噪音	PQ		
	VAC	VAC	Hz	Watt	RPM	CFM	m3/min	Inch/H2O	mm	db(A)	
SB908AN-11-1	115	100~120	50/60	65/80	2650/2800	90/100	2.5/2.8	1.6/1.8	40.64/45.72	69	2/1
SB908AN-11-2	115	100~120	50/60	55/70	2400/2300	80/75	2.3/2.1	1.5/1.4	38.1/35.56	56	4/3
SB908AN-11-3	115	100~120	50/60	45/60	1400/1700	50/61	1.4/1.7	0.36/0.47	9.14/11.94	48	6/5
SB908AN-11-3 (33)	115	100~120	50/60	45/60	1000/900	33/28	0.9/0.8	0.34/0.28	8.64/7.11	40	
SB908AN-11-1/2	115	100~120	50/60	65/80	2650/2800	90/100	2.5/2.8	1.6/1.8	40.64/45.72	69	2/1
dual speed				55/70	2450/2400	80/75	2.3/2.1	1.5/1.4	38.1/35.56	56	4/3
SB908AN-11-2/3	115	100~120	50/60	55/70	2400/2200	80/75	2.3/2.1	1.5/1.4	38.1/35.56	56	4/3
dual speed				45/60	1950/1500	61/46	1.7/1.3	0.42/0.35	10.67/8.89	48	6/5
SB908AN-22-1	230	200~240	50/60	65/80	2650/2800	90/100	2.5/2.8	1.6/1.8	40.64/45.72	69	2/1
SB908AN-22-2	230	200~240	50/60	55/70	2400/2300	80/75	2.3/2.1	1.5/1.4	38.1/35.56	56	4/3
SB908AN-22-3	230	200~240	50/60	45/60	1400/1600	50/57	1.4/1.6	0.36/0.46	9.14/11.68	48	6/5
SB908AN-22-3 (33)	230	200~240	50/60	45/60	1000/900	33/28	0.9/0.8	0.34/0.28	8.64/7.11	40	
SB908AN-22-1/2	230	200~240	50/60	65/80	2650/2800	90/100	2.5/2.8	1.6/1.8	40.64/45.72	69	2/1
dual speed				55/70	2450/2400	80/75	2.3/2.1	1.5/1.4	38.1/35.56	56	4/3
SB908AN-22-2/3	230	200~240	50/60	55/70	2400/2100	80/75	2.3/2.1	1.5/1.4	38.1/35.56	56	4/3
dual speed				45/60	1950/1400	61/46	1.7/1.3	0.42/0.35	10.67/8.89	48	6/5

- ** = "WB" for wire lead type Ball bearing, or "TB" for terminal type Ball bearing
- 100, 200, 240V 或特殊电压 12, 24, 28, 38, 42, 48, 380, 440, 480V... 50/60Hz, 任何电压都可订做。
- 双速 高/中 1速/2速, 中/低 2速/3速 可依需求制造。
- 保留修改资料与改良电子&机械设计的权利, 无须告知, 资料公差 ±10%

Motor

马达类别: Capacitor induction, inner rotor, 1-phase

马达防护: Thermal protector

IP 防护:

Mechanical

外框: Aluminum die cast, natural color, steel plate housing cover

叶轮: Glass fiber reinforced plastic, rated UL94V-0

轴承: Two ball bearings

旋转方向: CW seen on rotor

接头: Wire lead

重量: 1650 g (3.6 Lbs)

Electrical

绝缘强度: Over 1 min. at 1,500 VAC, 0.5mA, 50/60 Hz

绝缘电阻: Over 100 MΩ at DC 500V

讯号输出: Optional:R/D alarm output, tachometer output


Environment

使用温度: Ambient non-condensing -20~+75C

保存温度:

平均预期寿命: L10 80K hours at +45C, 40K hours at +60C

Performance P-Q Curves

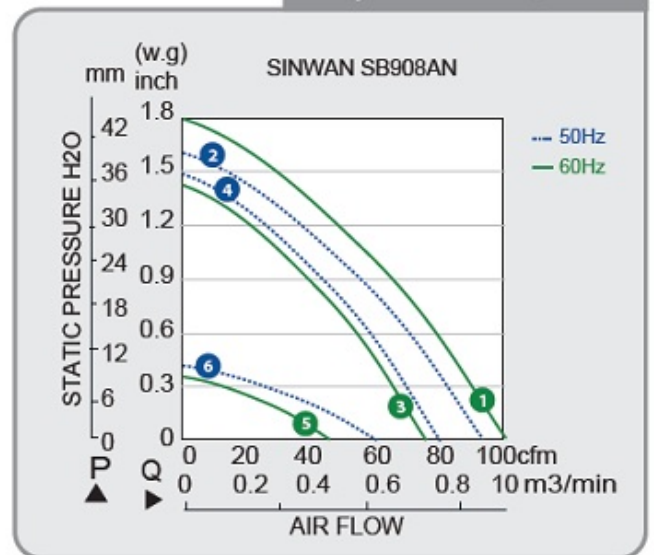

- Nomenclature
- F/G Tach
- R/D Alarm
- Dual Voltage
- Multiple Speed

▶ Outline Dimensions

相關產品

